

# Thermia® CF26

## Extraordinarily versatile windows

| SERIES FEATURES                       |                      |
|---------------------------------------|----------------------|
| Thermal break                         | No                   |
| Main frame                            | 65 mm                |
| Main leaf                             | 26 mm                |
| General thickness of the profiles     | 1.3 mm               |
| Maximum glazing                       | 10 mm / 17 mm        |
| Maximum leaf weight                   | 120 Kg               |
| Track option                          | 2,3,4 or more tracks |
| 90° frameless "KISS" closure solution | No                   |
| Available profiles                    | Window / Door        |



### ACOUSTICS

Estimated sound attenuation up to **Rw 36 dB**.  
Window size: 1.23 m x 1.45 m with acoustic laminated glass of 44.A/cam/44.A



### TEST RESULTS



Air permeability  
**3**




Watertightness  
Window: **5A** Balcony door: **3A**



Wind resistance  
Window: **C4** Balcony door: **C2**

Results of internal tests performed on ENSATEC® on the basis of Annex E of standard EN-14351-1:2006

### CROSS-SECTION

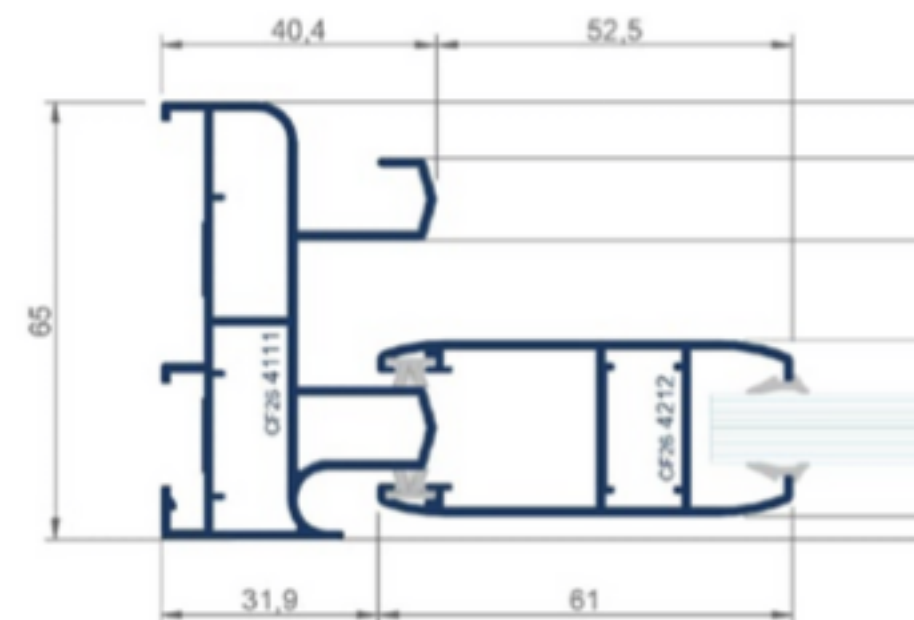

Quality seals



Qualanod seal for anodization  
License number: 1014



Qualicoat seal for lacquer  
License number: 405



Qualideco seal for the imitation wood  
License number: ES-0009F

Certification



THERMIA BARCELONA  
EN14351-1:2006+A2:2016

Windows for a better life