

ENERGY EFFICIENCY

Estimated acoustic performance up to Rw 36dB
 Window size: 1.23m x 1.45m with acoustic laminated glass of 4+4.1A/
 CAM/4+4.1A

TEST RESULTS

Protection against meteorological agents

Air permeability: **3**


Water tightness window: **5A**

Water tightness balcony: **3A**

Wind resistance: **Window C4 - Balcony C2**

Results of official tests performed on N° 146482 APPLUS and on the basis of Annex E of standard EN-14351-1:2006+A2:2016

SIDE & CENTRAL CROSS-SECTION

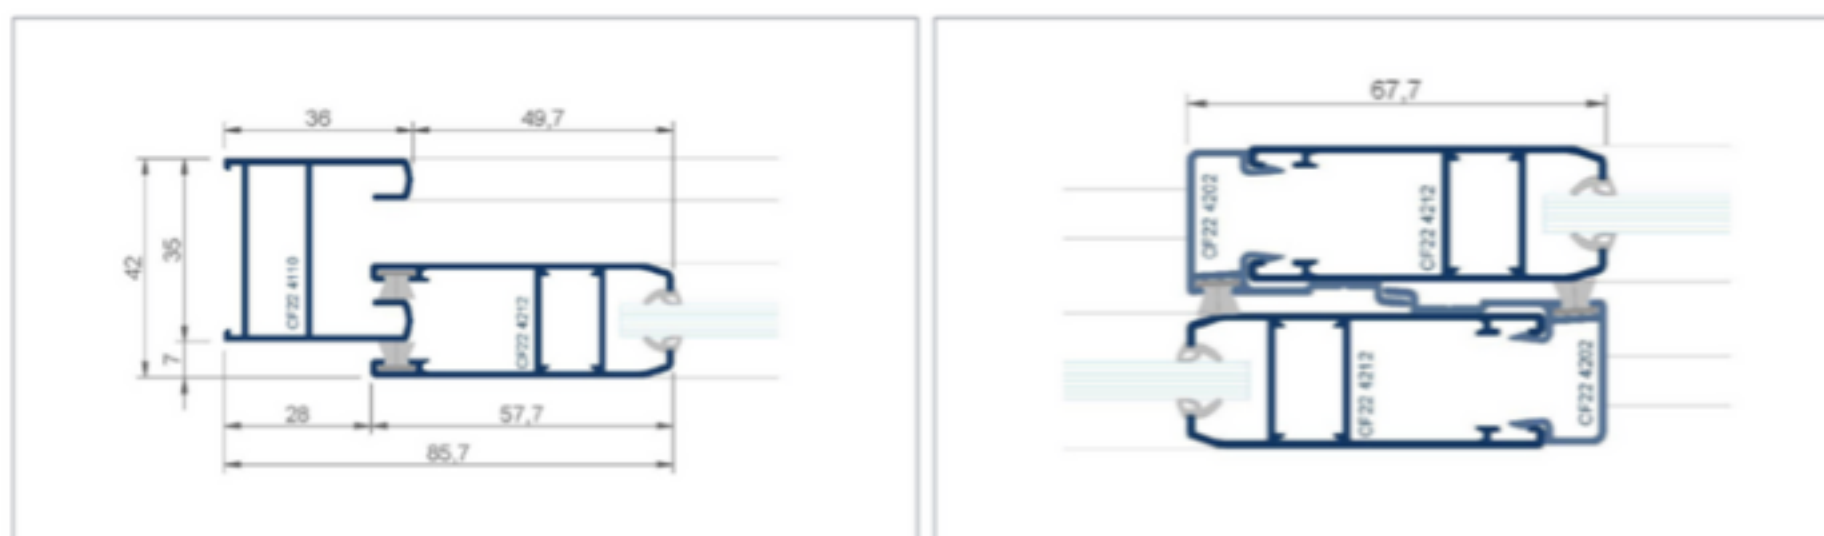

FRAME

Width: 65mm (corte perimetral)
 Thermal break: NO
 Profile thickness: 1,4mm/1,3mm
 Tracks: 2 carriles

SASH

Width: 26mm (corte recto)
 Thermal break: NO
 Profile thickness: 1mm / 1,3mm
 Hoja ajunquillada: NO
 Glass thickness: 4mm mín / 17mm máx.
 Maximum weight per leaf: 120Kg
 Maximum permitted dimensions:
 Consult at technical office
 Possibility of leaf reinforcement

HERRAJES

Multipoint closure: 1, 2, 3, 4 and 5 points
 Multipoint lock with key
 1 point lock
 embedded closure

GASKETS AND SEALING

Perimetral and central cross

OPENING POSSIBILITIES

Sliding 2, 3 and more rails

STRUCTURES

Windows
 Balcony

All components of the **Thermia CF26** system have their origin in the European Union.

ALLOY

6063 T-5 / 6060 T-5

LABORATORIOS

Gensatec Applus⁺

SURFACE FINISHES

Color powder coating in accordance with the QUALICOAT
 European certification >60 micras

Available with SEASIDE quality

Wood effect powder coating in accordance with the QUALI-
 DECO European certification

Anodized in accordance with the QUALANOD European
 certification > 15 microns available in 20 and 25 microns

