

Thermia® CR40 VERSIA

The basic, effective window

SERIES FEATURES

Thermal break	Yes, 24 mm
Main frame	65 mm
Main leaf	40 mm
General thickness of the profiles	1.4 mm / 1.6 mm
Maximum glazing	28 mm
Maximum leaf weight	200 Kg
Track option	2, 3 or more tracks
90° frameless "KISS" closure solution	Yes
Pocket solution	1,2 and 3 leaves
Available profiles	Window / Balcony Door




	THERMAL	Window $U_w = 1.58 \text{ W/m}^2\text{K}^*$ * Based on EN 10077-02 3.2x2.4 balcony door glass $U_g = 1.1 \psi = 0.053$
	ACOUSTICS	Estimated sound attenuation up to Rw 40 dB . Window size: 1.23 m x 1.45 m with acoustic laminated glass of 4.4/4.4A

TEST RESULTS

- Air permeability **4**
- Watertightness
Window: **6A** Balcony door: **7A**
- Wind resistance
Window: **C5** Balcony door: **C2**

Results of official tests performed on ENSATEC® 244728 - 243212
and on the basis of Annex E of standard EN-14351-1:2006 +
A2:2106.

CROSS-SECTION

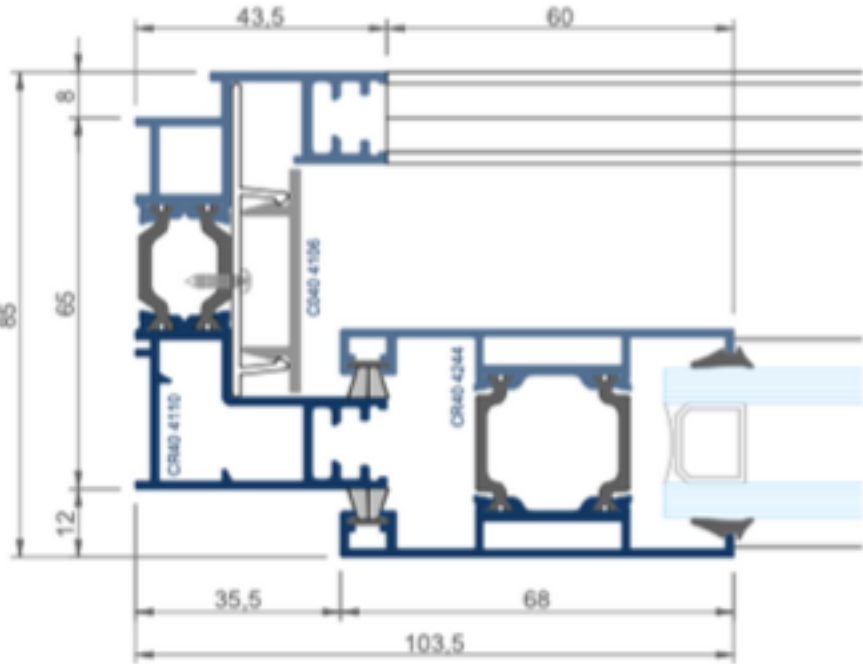

Quality seals



Qualanod seal
for anodization
License number: 1014



Qualicoat seal for
lacquer
License number: 405



Qualideco seal for the
imitation wood
License number: ES-0009F

Certification



THERMIA BARCELONA
EN14351-1:2006+A2:2016

